


■ フランジ寸法規格 JIS B2238

Flange dimensional standard

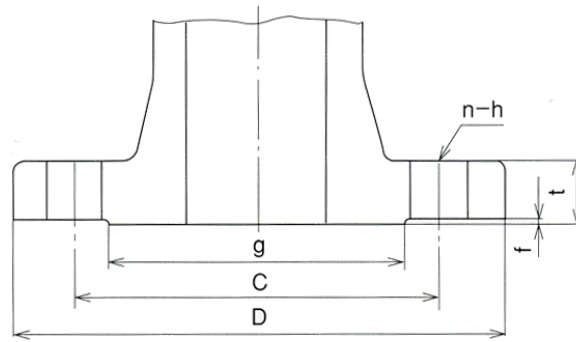

10K フランジ寸法表 (JIS B 2238-1998) 10K flange dimension table								
大きさの呼び Nominal size	フランジ Flange				ボルト穴 Bolt hole			ボルトのねじの呼び Nominal diameter of bolt thread
	外径 External diameter D	t	f	径 Diameter g	中心円の径 Diameter of center circle C	数 Number n	径 Diameter h	
10	90	12	1	46	65	4	15	M12
15	95	12	1	51	70	4	15	M12
20	100	14	1	56	75	4	15	M12
25	125	14	1	67	90	4	19	M16
32	135	16	2	76	100	4	19	M16
40	140	16	2	81	105	4	19	M16
50	155	16	2	96	120	4	19	M16
65	175	18	2	116	140	4	19	M16
80	185	18	2	126	150	8	19	M16
100	210	18	2	151	175	8	19	M16
125	250	20	2	182	210	8	23	M20
150	280	22	2	212	240	8	23	M20
200	330	22	2	262	290	12	23	M20
250	400	24	2	324	355	12	25	M22
300	445	24	3	368	400	16	25	M22

20K フランジ寸法表 (JIS B 2238) 20K flange dimension table								
大きさの呼び Nominal size	フランジ Flange				ボルト穴 Bolt hole			ボルトのねじの呼び Nominal diameter of bolt thread
	外径 External diameter D	t	f	径 Diameter g	中心円の径 Diameter of center circle C	数 Number n	径 Diameter h	
10	90	14	1	46	65	4	15	M12
15	95	14	1	51	70	4	15	M12
20	100	16	1	56	75	4	15	M12
25	125	16	1	67	90	4	19	M16
32	135	18	2	76	100	4	19	M16
40	140	18	2	81	105	4	19	M16
50	155	18	2	96	120	8	19	M16
65	175	20	2	116	140	8	19	M16
80	200	22	2	132	160	8	23	M20
100	225	24	2	160	185	8	23	M20
125	270	26	2	195	225	8	25	M22
150	305	28	2	230	260	12	25	M22
200	350	30	2	275	305	12	25	M22
250	430	34	2	345	380	12	27	M24
300	480	36	3	395	430	16	27	M24

30K フランジ寸法表 (JIS B 2238-1998) 30K flange dimension table								
大きさの呼び Nominal size	フランジ Flange				ボルト穴 Bolt hole			ボルトのねじの呼び Nominal diameter of bolt thread
	外径 External diameter D	t	f	径 Diameter g	中心円の径 Diameter of center circle C	数 Number n	径 Diameter h	
10	110	16	1	52	75	4	19	M16
15	115	18	1	55	80	4	19	M16
20	120	18	1	60	85	4	19	M16
25	130	20	1	70	95	4	19	M16
32	140	22	2	80	105	4	19	M16
40	160	22	2	90	120	4	23	M20
50	165	22	2	105	130	8	19	M16
65	200	26	2	130	160	8	23	M20
80	210	28	2	140	170	8	23	M20
100	240	32	2	160	195	8	25	M22
125	275	36	2	195	230	8	25	M22
150	325	38	2	235	275	12	27	M24
200	370	42	2	280	320	12	27	M24
250	450	48	2	345	390	12	33	M30×3
300	515	52	3	405	450	16	33	M30×3

注記 Notes

- 1) 各種バルブの各クラス別フランジにおける「大平面座」の面間Lは標準品の基本面間と同じです。(外国規格フランジ品についても同じ)
The face-to-face length (L) of "large plane seat" of flange by valve class is the same as the basicface-to-face length of the standard valve.
(The same can be said about foreign-standard flange products.)
- 2) 全面座(フラットフェース)フランジ品も製作いたします。
The flat-face-seat flange products can be manufactured.
- 3) 全面座フランジの厚さは座の高さを含み面間寸法は標準品と同じです。
The thickness of the flat-face-seat flange includes the seat height and the face-to-face length is the same as the standard product.